


# SPECIFICATION PRINT

## 16DS Drain Aftercooler

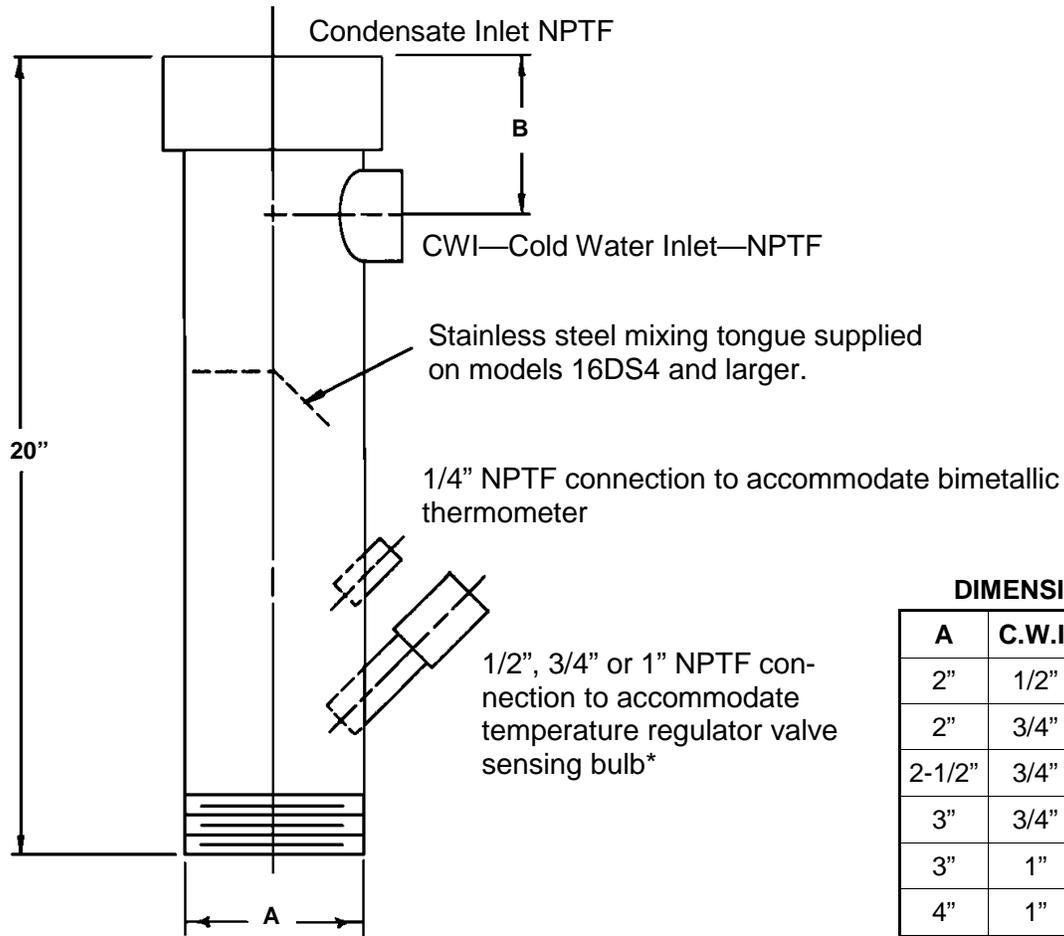

**DIMENSIONS**

A	C.W.I.	B
2"	1/2"	3"
2"	3/4"	3"
2-1/2"	3/4"	3"
3"	3/4"	4-1/2"
3"	1"	4-1/2"
4"	1"	4-1/2"
4"	1-1/4"	4-1/2"
5"	1-1/4"	5"
5"	1-1/2"	5"
6"	1-1/2"	5"
6"	2"	5"

\* Temperature regulator valve sensing bulb to be installed in lower section so that mixed water temperature is sensed by bulb. Valve modulates to add sufficient cold water to lower drain water temperature. See Penn Brochure pages B-7 thru B-8.5 for further details.

**Temperature Regulator Valves Ranges**

Valve Size	Valve Type	Adjustable Temperature Range
1/2"	56T	100-175°F
3/4"	56T	100-175°F
1"	56T	100-175°F
1-1/4"	56T	100-175°F
1-1/2"	Series PS	115-180°F
2"	Series PS	115-160°F
2-1/2"	Series PS	115-160°F



**Penn Separator Corp.**

PO Box 340, Brookville, PA 15825

**16DS Drain Aftercooler**

Rev. 3 MJG 10/20/08

A 26008-3