


# SPECIFICATION PRINT

## MBI—MIST SEPARATOR

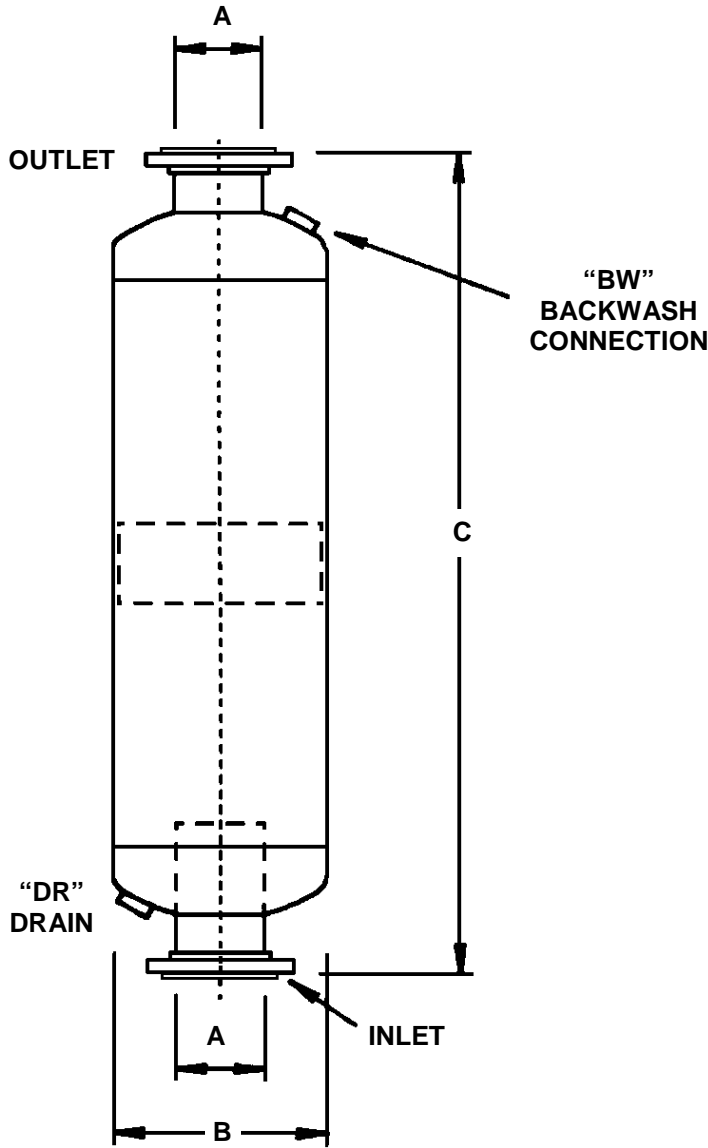

MODEL				
A	B	C	DR	BW
3	6	24	1.25	0.75
3	8	26	1.25	0.75
5	10	30	1.25	0.75
5	12	32	1.50	1.50
6	12	32	1.50	1.50
6	14	34	1.50	1.50
6	16	36	1.50	1.50
6	18	38	1.50	1.50
6	20	40	2	2
8	16	36	1.50	1.50
8	18	38	1.50	1.50
8	20	40	2	2
8	24	44	2	2
8	30	52	2	2
8	36	58	2	2
10	30	52	2	2
10	36	58	2	2

### MATERIAL SPECIFICATIONS:

Heads: SA516-70, SA234WPB  
 Shell: SA53-B, SA516-70  
 Pipe: SA53-B, SA106-B  
 Coupling: SA105  
 Flanges: SA105  
 Finish: Shop Primer

### SPECIFICATIONS:

- Flanged connections (Std.) are supplied for inlet and outlet, and are 150# ANSI class. Other connections are NPTF.
- Different configurations, materials, and nozzle types available on request.
- Constructed and stamped in accordance with the latest ASME Code, Sec. VIII, Div. 1



Separator Corp.

PO Box 340, Brookville, PA 15825

MBI—"Mist Separator"

REV. 1 SAM

1/4/99

A 76006-1